

65" (64.5" viewable) Full HD LED Commercial Display

USB Multimedia Playback

CDE6502



Deploy high-impact messaging with ease, with the ViewSonic® CDE6502 65" (64.5" viewable) commercial LED display. Thanks to an integrated USB multimedia player, vibrant photos, music, and video content can be displayed for catching the attention of passersby. What's more, with a quad-core processor, 8GB of built-in memory, and RJ45 connectivity, the display also delivers convenient web browsing capabilities without having to connect to a clunky PC. And when it comes to control, it's got everything you need for easy and efficient multi-display management right from your notebook or PC. Whichever options best suit your needs, your message will make its mark with bright, beautiful Full HD multimedia images and sound.

Key Features:


- Integrated USB multimedia player
- Quad-core processor and RJ45 connectivity
- Free bundled vController software
- Control multiple devices with HDMI CEC and IR pass-through
- Enhanced viewing comfort

Designed for:

- Hospitality
- Business
- Retail

65" (64.5" viewable) Full HD LED Commercial Display

CDE6502

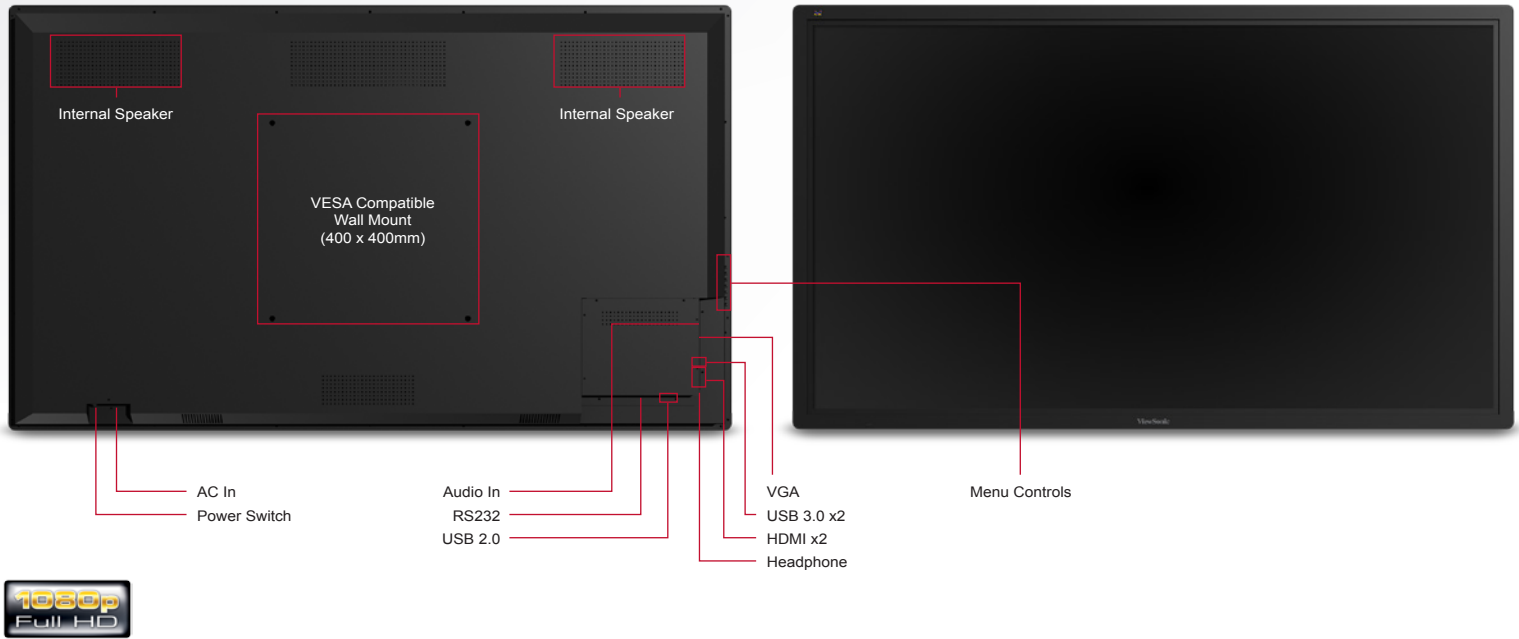

Specifications

PANEL	Type Display Area Optimum Resolution Contrast Ratio Viewing Angles Response Time Light Source Brightness Aspect Ratio Panel Surface	MVA Type TFT LCD Module with DLED Backlight 56.2" horizontal x 31.6" vertical; 65.0" diagonal 1920x1080 4000:1 (typ) 178° horizontal, 178° vertical 8ms Long life, 30,000 hrs. (typ) 350 cd/m ² 16:9 Anti-glare, hard coating 3H	POWER	Voltage Consumption	AC 100–240V (universal), 50 / 60Hz 150W (typ), 180W (max)
INPUT	Video Input Control Input	HDMI, MHL, VGA RS232	OPERATING CONDITIONS	Temperature Humidity	32-104°F (0–40°C) 20-80% (non-condensing)
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)	DIMENSIONS (W x H x D)	Physical Packaging	59.5 x 35.0 x 3.4 in. / 1512 x 888 x 87 mm 63.7 x 40.8 x 8.8 in. / 1618 x 1037 x 223 mm
INPUT SIGNAL	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p	BEZEL DIMENSIONS	Top/Left Bottom / Right	30 mm / 30 mm 30 mm / 30 mm
CONNECTOR	Analog Digital Power	15-pin mini D-sub (VGA x1), PC Audio In (x1), headphone out HDMI, HDMI/MHL, USB, RS232 AC In	WEIGHT	Net Gross	103.6 lbs / 47 kg 125.7 lbs / 57 kg
CONTROLS	Panel Picture Sound Setting Lock	Power, Settings, Vol+, Vol-, Home, Input, Return Picture mode, Contrast, Brightness, Hue, Sharpness, Saturation, Anti-flicker, Backlight, Clock, Phase, Horizontal position, Vertical position, Auto tune, Color temperature Sound mode, Bass, Treble, Balance, Surround, Alone Source auto switch, MHL auto switch, Movie mode, Menu timeout, Date/time, Off timer, On timer, Sleep time Lock system, Set password, Block program, System ID, Lock keypad, Restore to default	WALL MOUNT	VESA Compatible	400 x 400 mm
			REGULATIONS		cTUVus, FCC, ENERGY STAR 7.0, Mexico Energy, CE, CB, RoHS, ErP, WEEE
			RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
			WARRANTY		Three-year limited warranty on parts and labor

Optional Accessories

VESA Compatible Wall Mount	WMK-047
Trolley Cart	LB-STND-003
Solstice Software - Unlimited Users	SW-050*
Solstice Software SGE - 4 Users	SW-051*
The Solstice Pod - Unlimited Users	NMP250-WU
The Solstice Pod SGE - 4 Users	NMP250-WL

What's in the box?

CDE6502 display, power cable, remote control with batteries, ViewSonic Wizard CD (User Guide), Quick Start Guide



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.